INSTALLATION INSTRUCTIONS

SK6066CH1 **SK6066BN1**

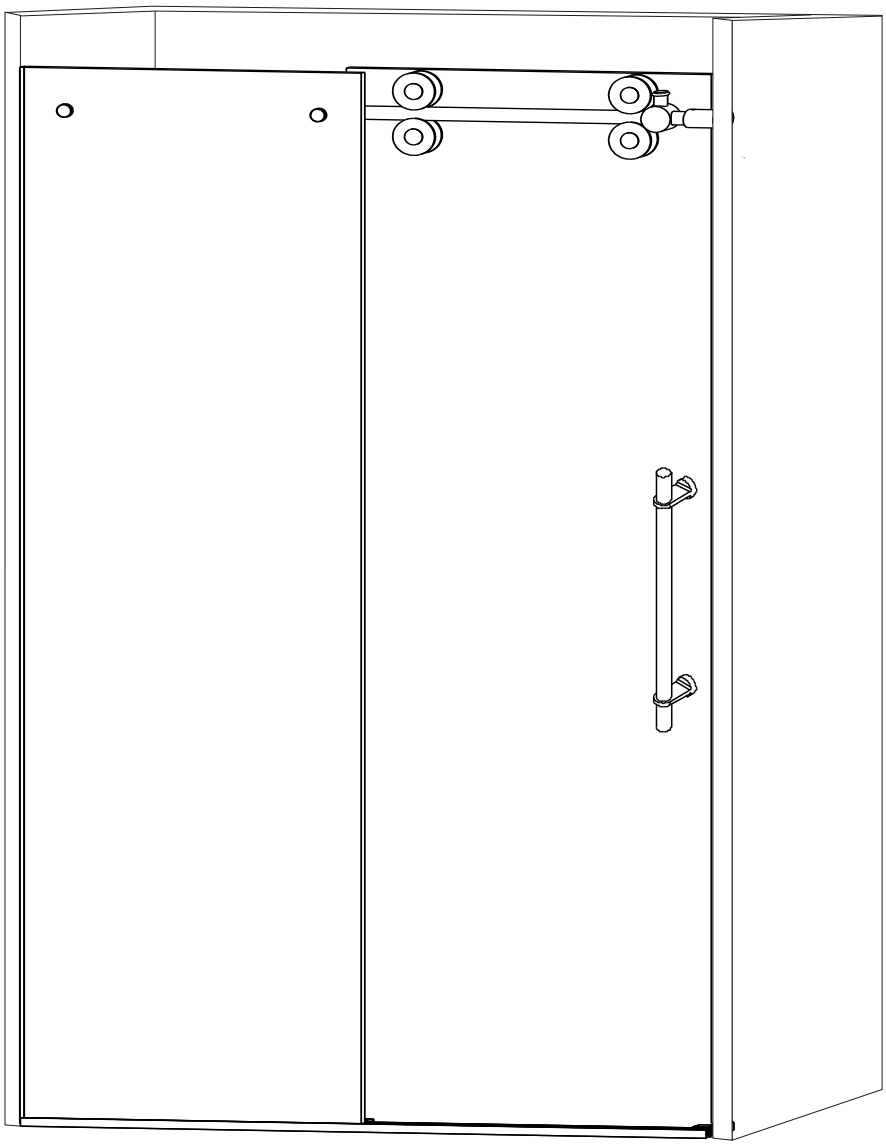

◆ General Information

Please inspect the product immediately upon receipt for transit damage, missing packs/parts or manufacturing fault. Damage reported later cannot be accepted. Please handle the product with care avoiding knocks and shock loading to all sides and edges of the glass.

Notes: Safety glass can not be re-worked.

Please read these instructions carefully before start of installation.
Special care should be taken when drilling walls to avoid hidden pipesor electrical cables.
Note: This product is heavy and may require two people to install.

Aftercare instructions

After use, your shower should be cleaned with soap and water. This is particularly important in hard water districts where insoluble lime salts maybe deposited and allowed to build up. Cleaners of a gritty or abrasive nature should not be used. Care should be taken to avoid contact with strong chemicals, they can be used but with caution, if in doubt contact the manufacturer of the cleaner in question.
Please keep these instructions for aftercareand customer service details.

Tools Required








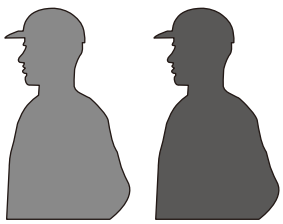




This product is heavy and may require two people to install.



◆ Assembly Drawing

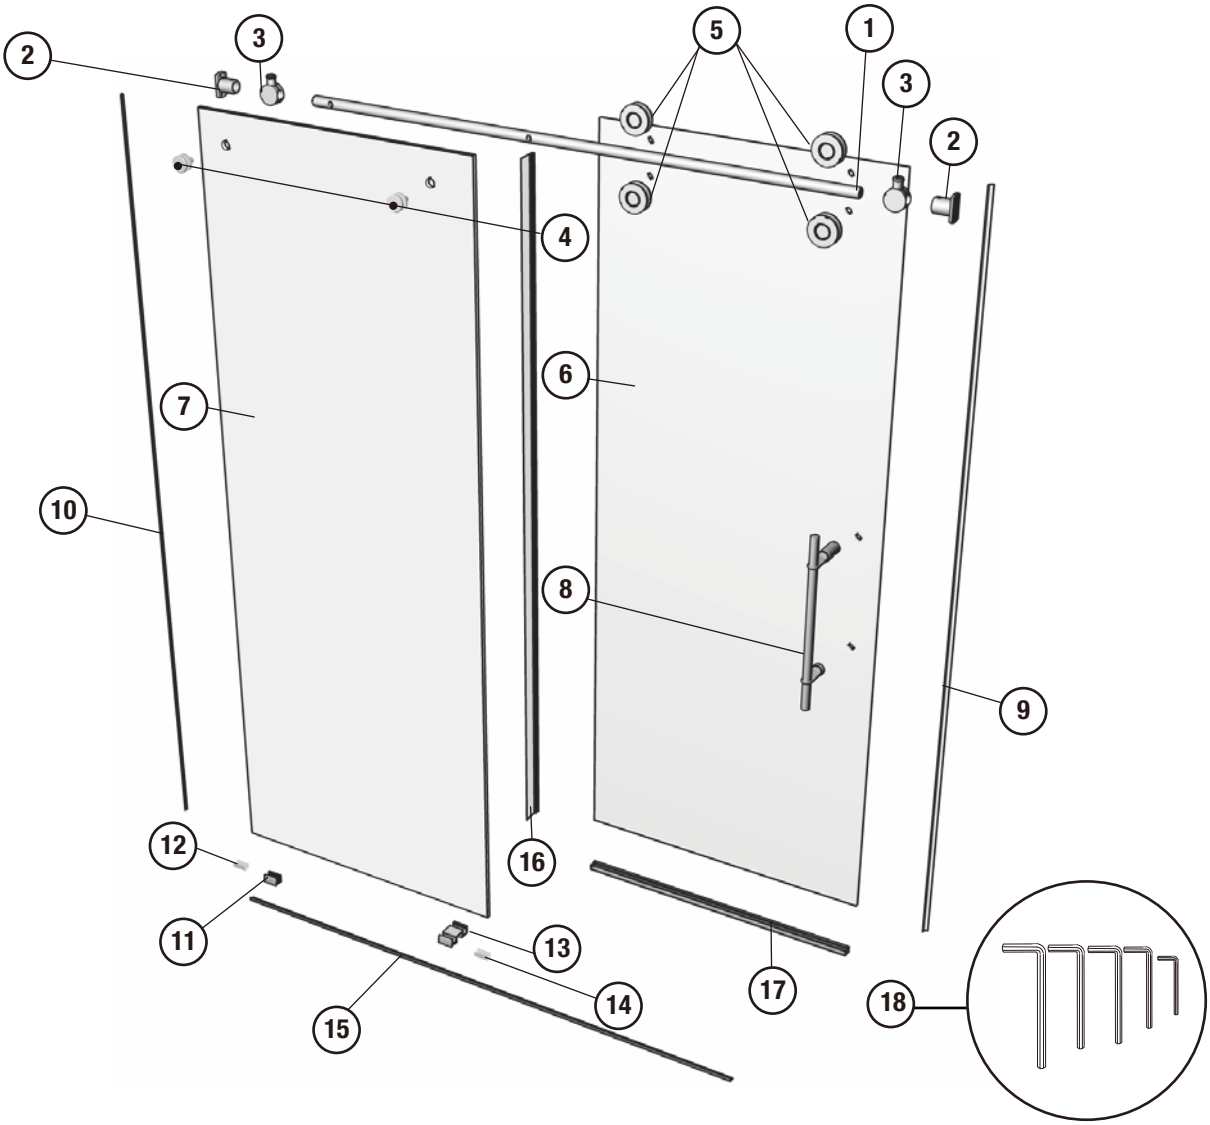

REQUIRED PARTS

Item no.in exploded diagram	Description	Q'TY	Item no.in exploded diagram	Description	Q'TY
1	Running Rail	1	10	Fixed Panel Gasket	1
2	Wall Bracket	2	11	Bottom Glass Clip	1
3	Stoppers	2	12	Gasket (Glass Clip)	1
4	Glass Holders	2	13	Bottom Guide	1
5	Twin Rollers	4	14	Door Bottom Gasket	1
6	Sliding Door Panel	1	15	Threshold	1
7	Fixed Side Panel	1	16	Door Panel Side Gasket	1
8	Straight Handle	1	17	Door Panel Bottom Gasket	1
9	Door Panel Gasket	1	18	Allen Wrenchs	5

Step 1: Gasket installation

Step 1A

Using the cardboard packaging box as platform, install bottom door gasket (17) onto door panel (6) using a block and a mallet. Notice the gasket orientation.

Step 1B

Place door panel (6) inside tub to simplify following installation procedures. Ensure placing the panel onto a cushioned surface, such as a towel or card board, to prevent damage either to the panel or the tub.

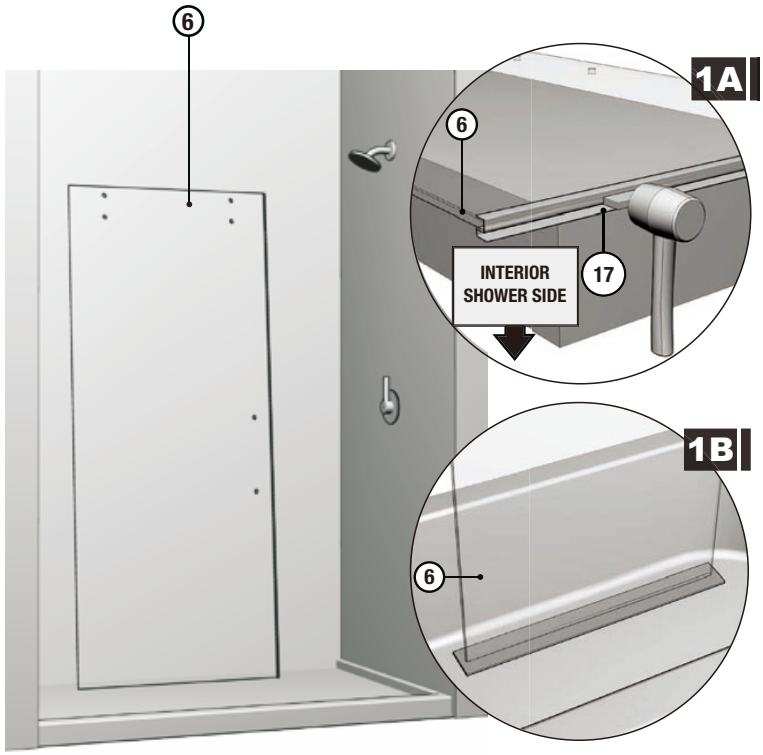

Step 1C

Thoroughly clean the edge of the fixed panel (7). Fix the gasket to the edge of the fixed panel.

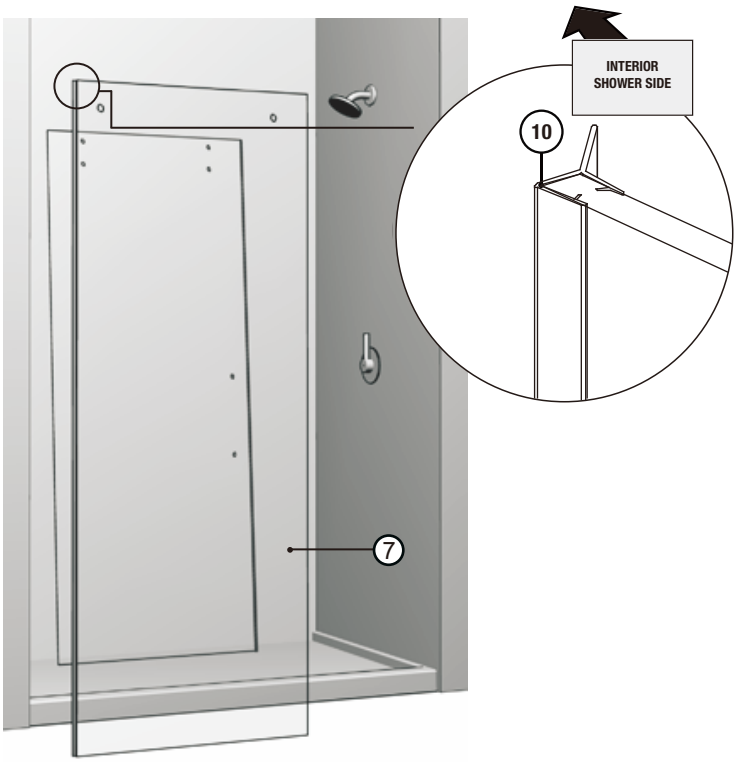

Step 2: Running rail

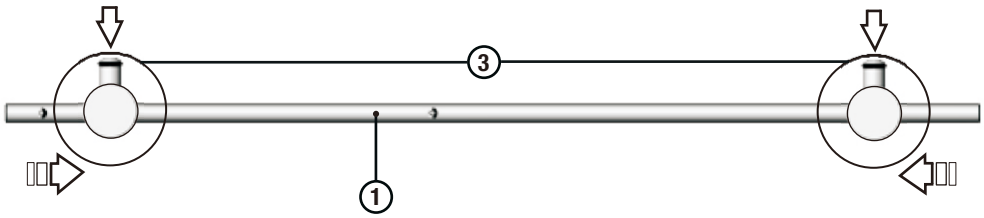

Step 2A

Position the stoppers (3) on the running rail (1) as illustrated. Secure them temporarily in place.

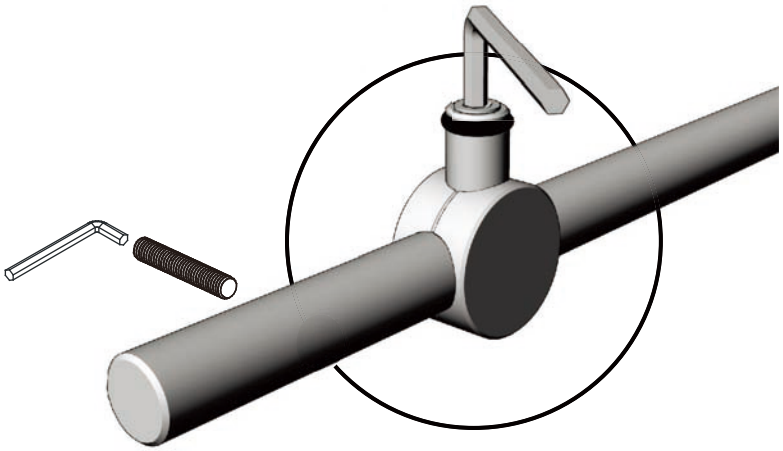

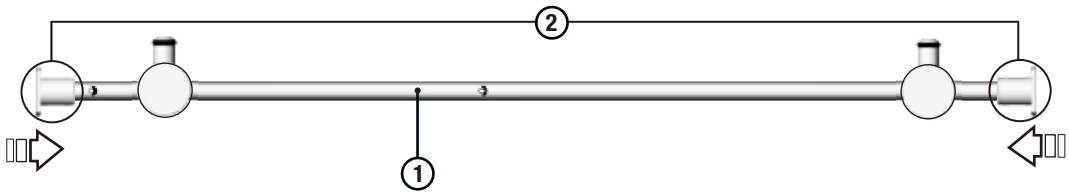

Step 2B

Position the wall brackets (2) on the running rail (1) as illustrated. Secure them temporarily in place.

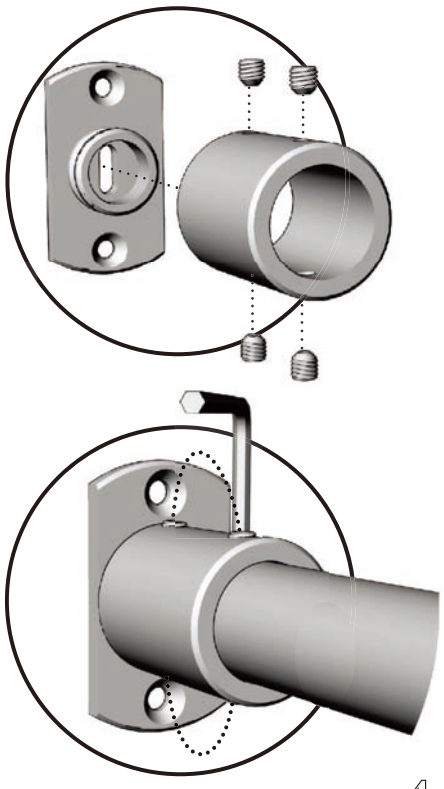

Step 3: Glass holders

Step 3A

Fasten the running rail (1) to the fixed panel (7) with the glass holders (4).
Secure them temporarily in place.

Ensure that the running rail (1) is at the highest possible position in reference to the holes of the fixed panel (7).

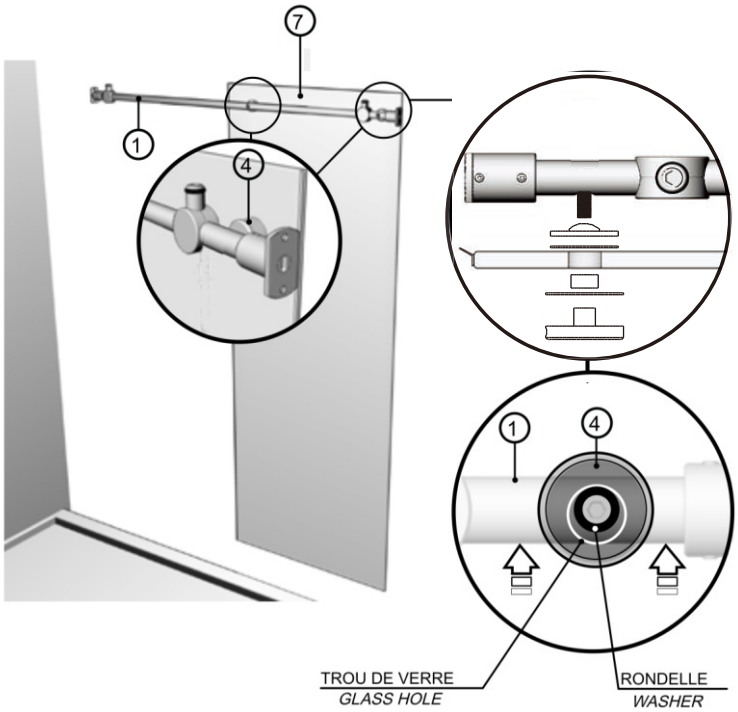

Step 4: Glass clips

Insert bottom gaskets (12) and (14) in the bottom glass clips (11) and (13).

Position glass clips (11) (13) onto panel (7) as shown.

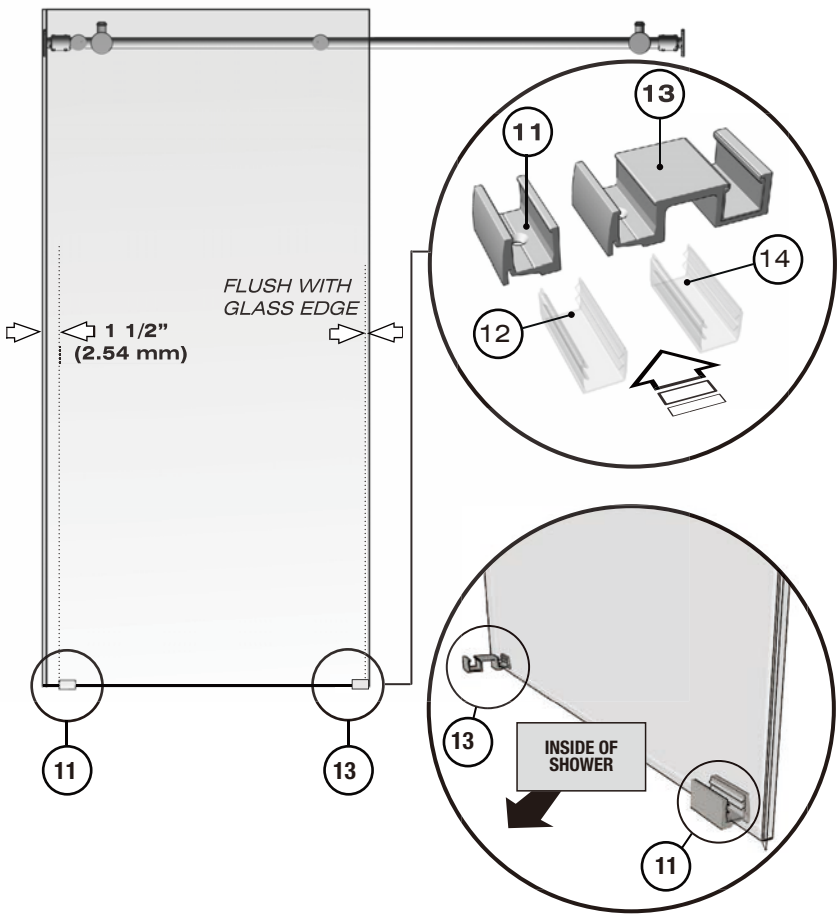

Step 5: Flxedanel placemenent

Step 5A

Position the fixed panel assembly (7) on thresh old of base (B) as shown.

Adjust the fixed panel (7), by way of the running rail (1), so as to force the gasket (10) against the wall.

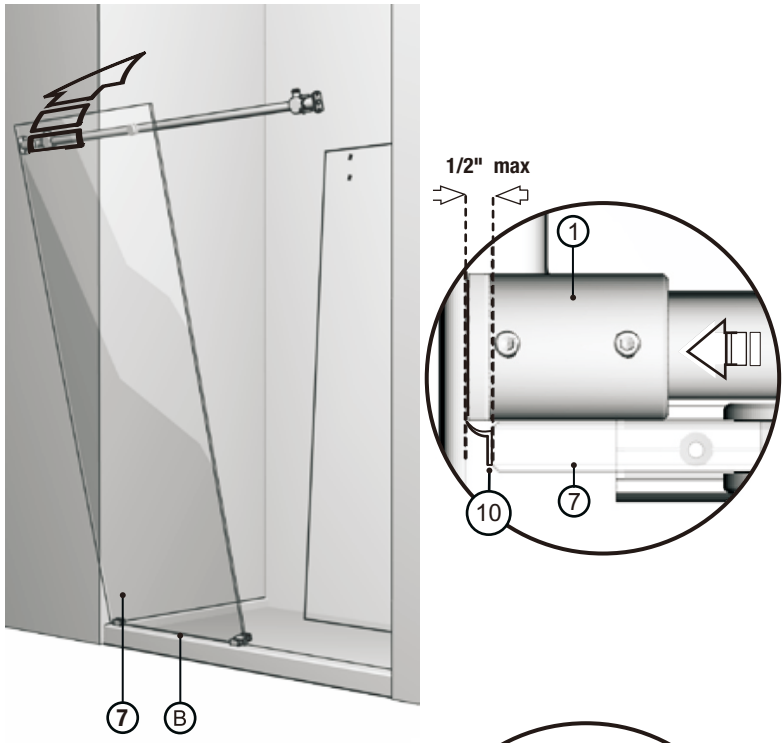

Step 5B

Ensure that the running rail (1) is level and that the fixed panel (7) is square. If a horizontal cor rection is required, adjust and level the glass fasteners (4).

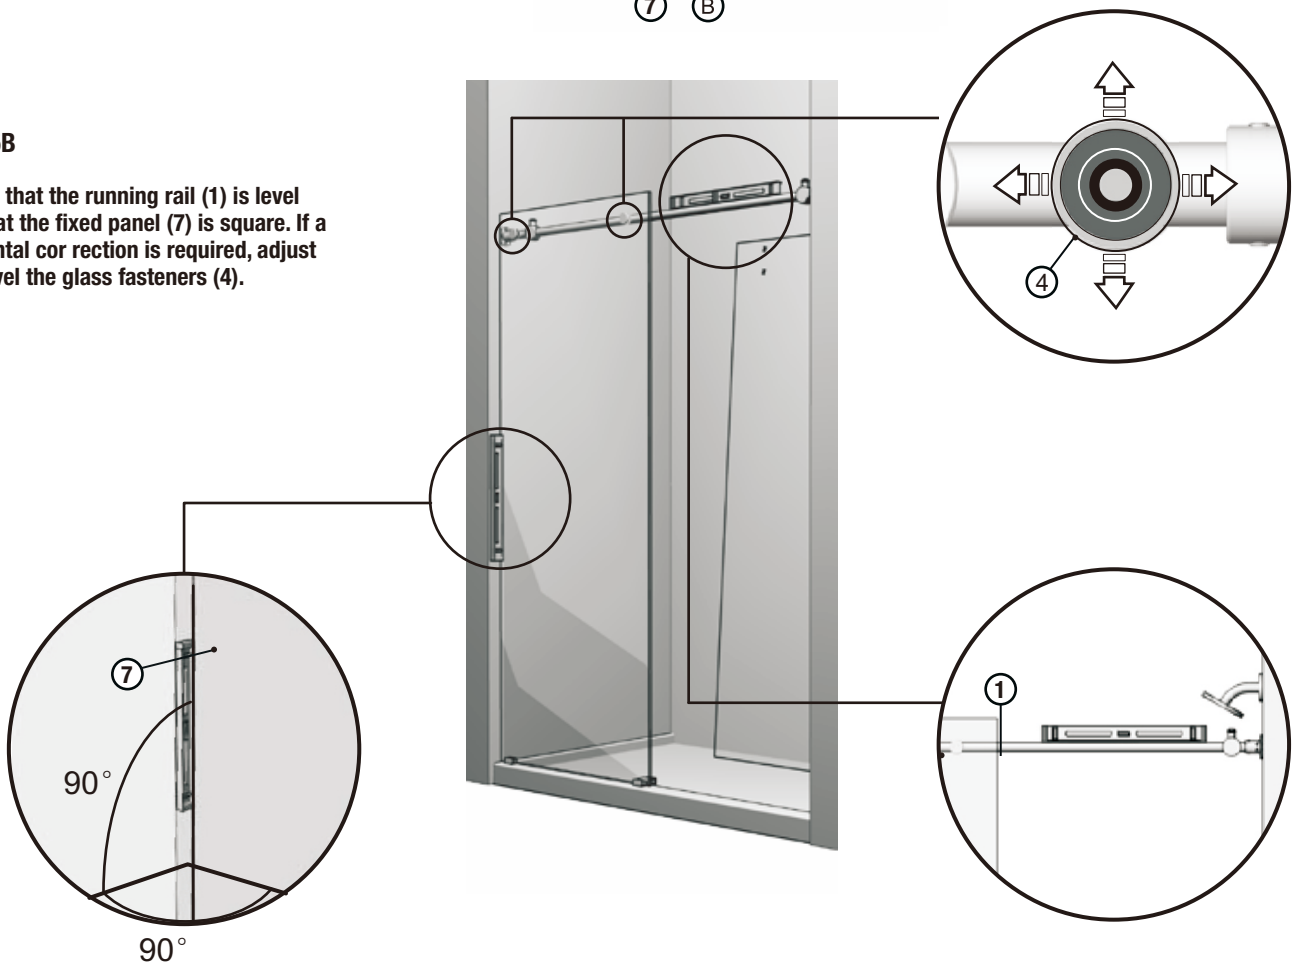

Step 5C

Mark the screw locations for the wall brackets (2) on the walls on both sides of shower as well as the placement of the bottom glass clips (11) (13).

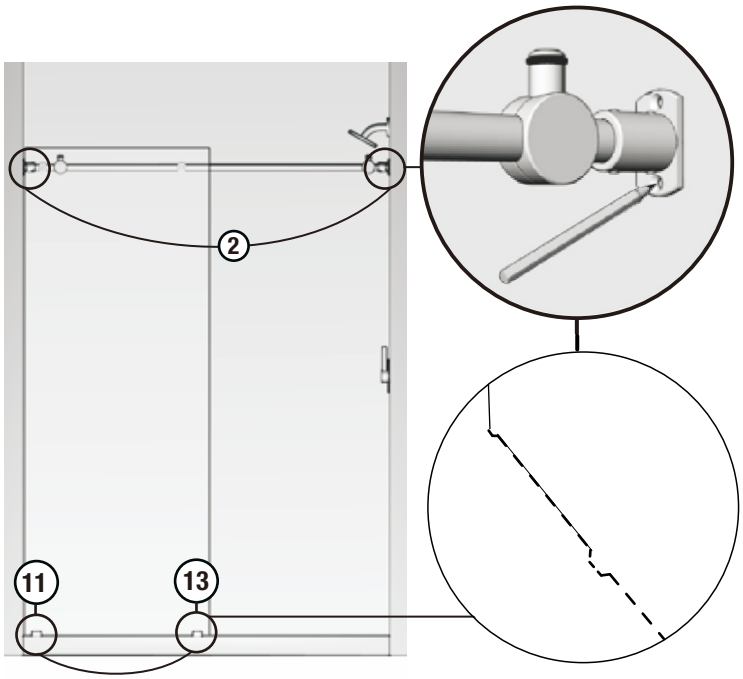

Step 6: Threshold

Step 6A

Remove the fixed panel assembly so as to allow placement of the threshold (15) onto the base. Ensure that a bead of silicone (S) is applied to the underside of the threshold before installing.

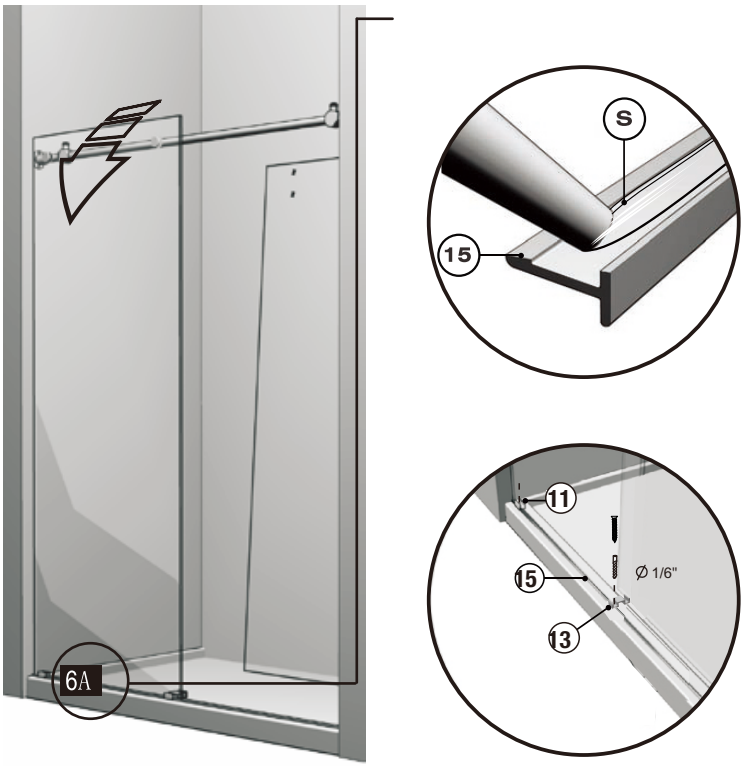

Step 6B / Étape 6B

Secure glass clips (11) (13) with self-tapping screws.

Step 7: Wall brackets

Step 7A

Mark the screw locations on the walls on both sides of shower. Remove the running rail (1) from the wall brackets (2). Drill holes in walls until wall stud is reached with a drill bit intended for ceramic tiles.

Fasten the wall brackets (2) with #12-3 (18).

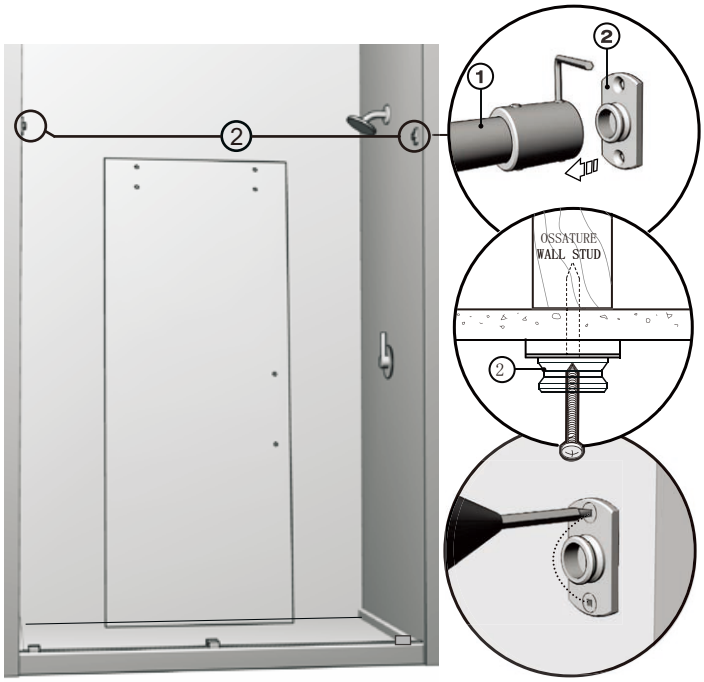

Step 7B

Insert fixed panel (7) back, ensuring that it's placed in the bottom glass clips (11) (13).

Side expander (E) over wall bracket (2) and fasten set screws.

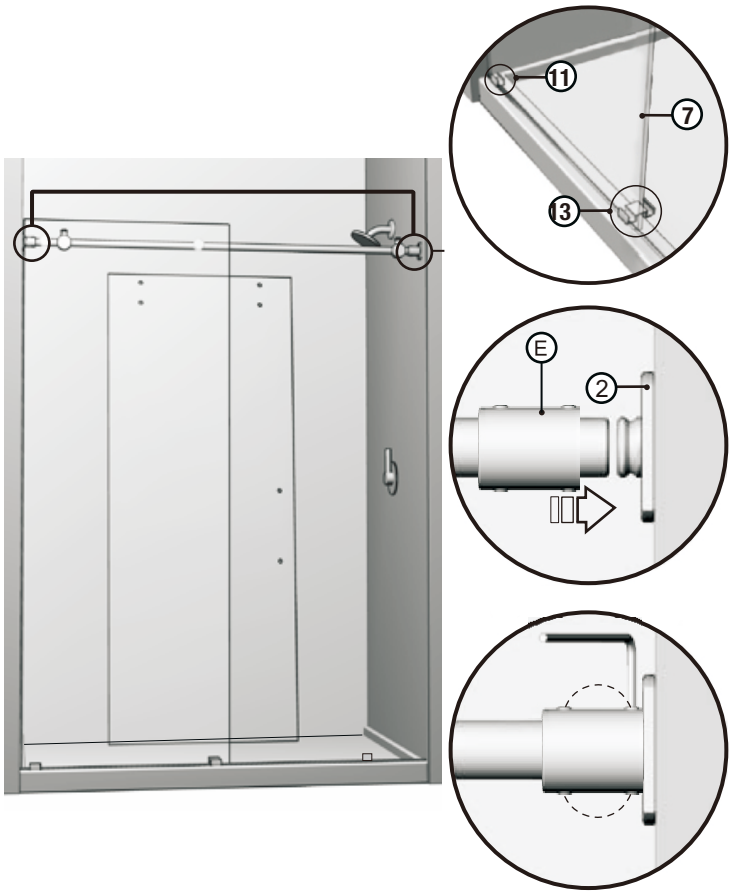

Step 8: Sliding door

Step 8A

Assemble the 2 top rollers (5) to the door panel (6) as illustrated.

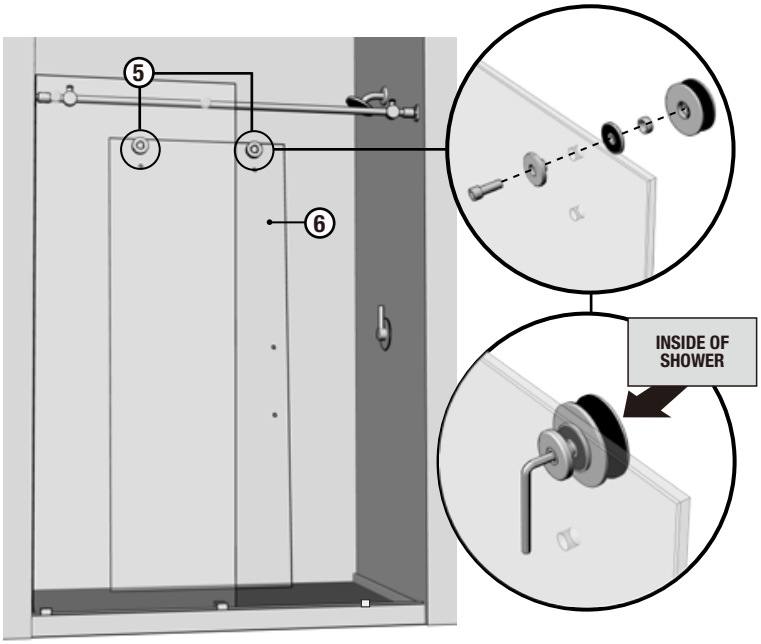

Step 8B

Install bottom rollers, making sure that they are tangent to the running rail (1).

Through the use of the nonconcentric washers, adjust rollers so that the sliding door panel is parallel to the running rail.

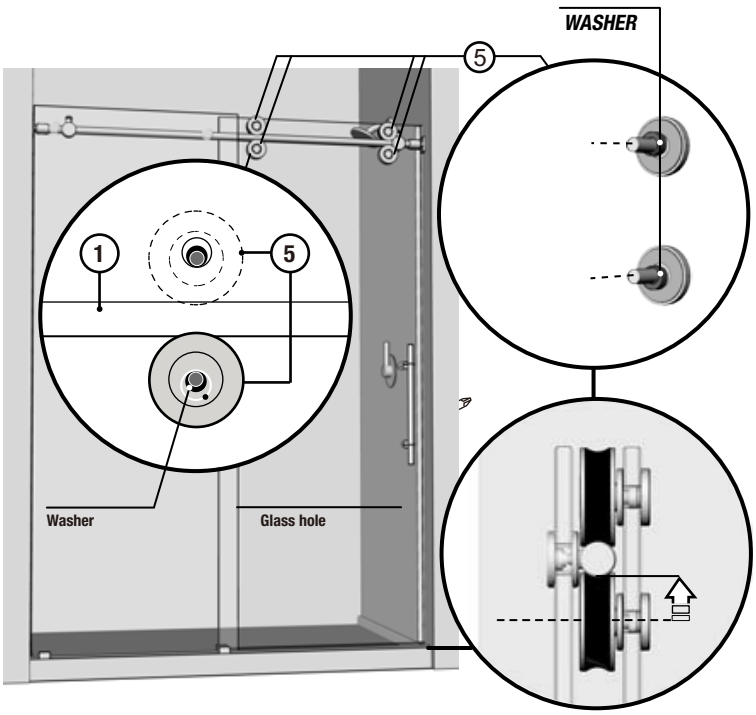

Step 9: Straight handle

Step 9A

Install door panel (7), rollers (5) are positioned over the running ensuring that the rail (1).

Install straight handle (8) onto sliding door (6). Ensure that clear washers on either side of glass are installed.

Ensure that the door panel (6) is placed within the bottom center guide (13).

Note the placement of the bottom door gasket (14).

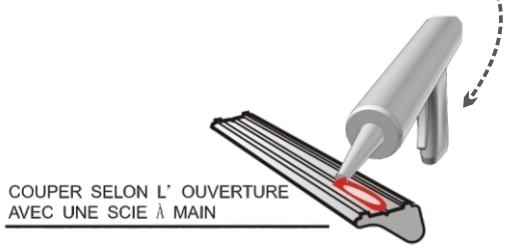

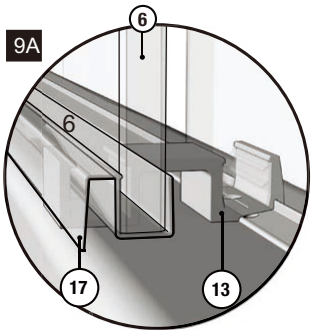

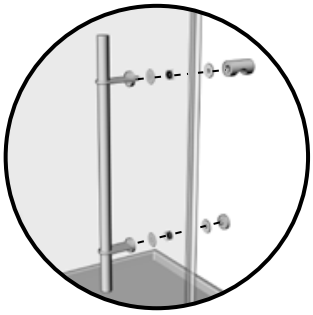

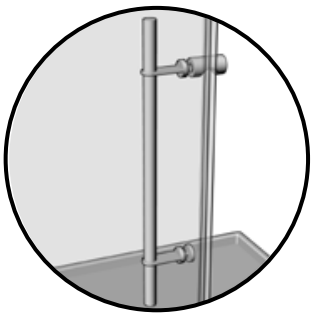

Step 10: Gaskets installation

Step 10A

Install door side gasket (16) onto sliding door panel (6).

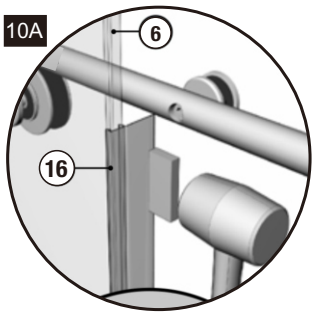

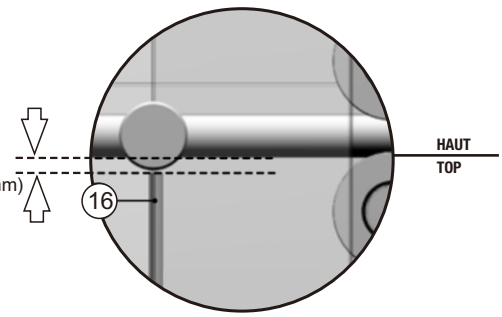

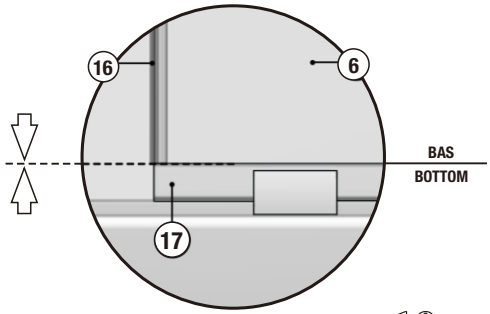

Step 11: Stoppers

Step 11A

Adjust the position of the stoppers (3) so as to ensure a maximum opening and closing range. Ensure that the sliding door gasket (9) is forced against the wall.

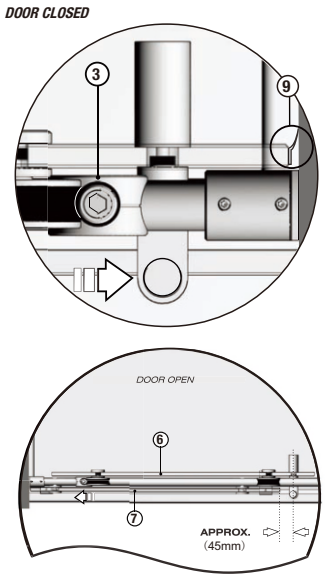

Step 12: Silicone

Step 12A

Apply silicone between the bottom of the fixed panel and the threshold of the base. Silicone application along the length of the threshold is also suggested. In both cases, it is done from the outside of the shower area.

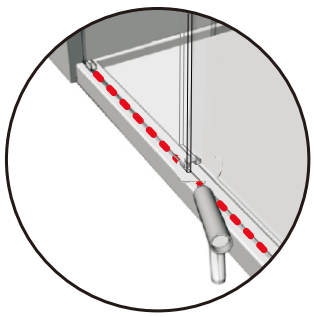

PRODUCT WARRANTY

Thank you for purchasing one of our quality shower products.

Any claim under this limited warranty must be made within 3 years of the date of purchase the product.

For any limited warranty claim, simply contact your local retailer. A valid Proof of Purchase is required.

The warranty covers manufacturer defects in materials, workmanship and finish under normal use.

This warranty is provided in addition to other rights and remedies you may have under law; our goods come with guarantees which cannot be excluded under the American Consumer Law. You are entitled to replacement or refund for a major failure and to compensation for other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

The warranty excludes damage resulting from product misuse or product neglect.

CKB SHOWER SUPPLIES
EMAIL: ckbshowerdoor@gmail.com
WEB: www.ckbworld.com